How to upgrade Firmware

1. Open the AllSolus Configuration Tool
   a. From the start menu select "AllSolus Config Tool"
   b. Install Software from CD if required
   c. Install USB drivers from CD if required

2. Connect to the AllSolus device using USB cable
   a. Click "Connect"
   b. Select Comms port number used for connection
   c. Select OK

   Note: EnviroLinks may take up to 10 minutes to charge before connection is possible.

3. Check current firmware version
   a. Click tab "General Device Settings"
   b. Note the "Firmware Version" number
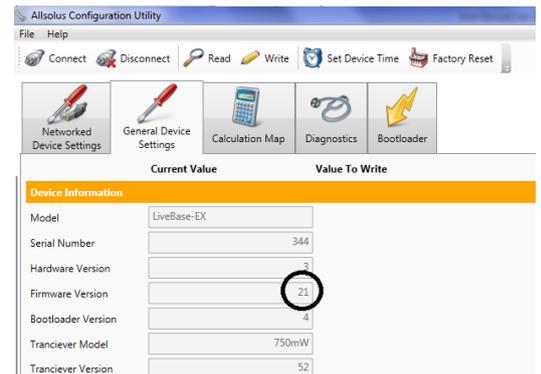
4. Upgrade the firmware
   a. Click tab "Bootloader"
   b. Click "Select Firmware" and open new firmware file
   c. Click "Suspend Device"
   d. Click upload firmware
   e. Wait for upload to complete (30 seconds)
   f. Click Restart Device

5. Confirm firmware is uploaded
   a. Repeat step 3